


# facade Corner

## Datasheet



CX-L100

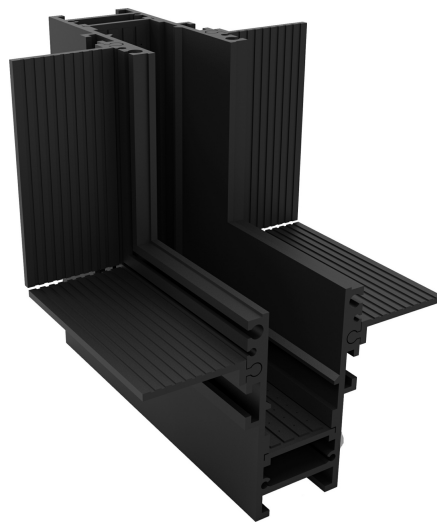

Please scan the QR code above to check the latest version of datasheet!

Before using this product, please read this datasheet carefully and keep it properly!

Document Version: C

---

## ◆◆ Overview

**Facade Corner** (hereinafter referred to as the “product” or “device”) is a facade corner for magnetic lights, primarily suitable for indoor spaces such as hotels, luxury homes, clubs, model rooms, sales offices, museums, restaurants, shopping malls, shops, etc., which require special lighting.

### Main functions:

- Facade Corner with black painted finish (RAL 9005);
- Measurement 100mm x 100mm;
- Degree of housing protection according to DIN EN 60529 (IP20) ;
- Ceiling to wall transition requires configuration of Facade Corner.

Note: Please note that the pictures and illustrations provided in this instruction manual are for reference purposes only, and the actual product may differ.

## ◆◆ Appearance



Figure 1

## ◆◆ Specifications

| Item              | Parameter     |
|-------------------|---------------|
| Dimensions        | 100mm x 100mm |
| Cutout            | 100mm x 100mm |
| Weight            | 189g          |
| Installation site | Indoor        |
| Housing           | Black         |

|                                     |      |
|-------------------------------------|------|
| IP degree (compliant with EN 60529) | IP20 |
|-------------------------------------|------|

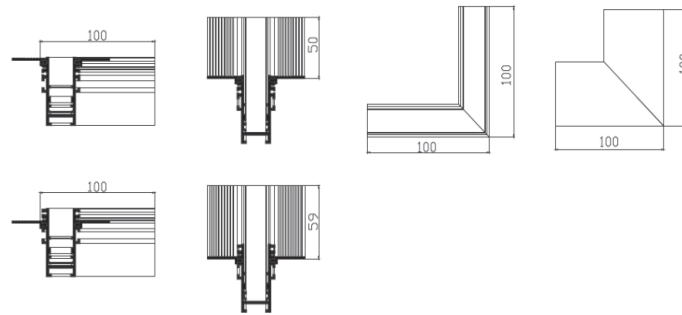


Figure 2

## ◆◆ Safety Precaution

### Danger:

- Please do not privately disassemble or replace any parts of the product. Otherwise, it may cause mechanical fault, electric shock, fire or personal injuries.
- Under no circumstances should the product be covered by insulation pads or similar materials.

### Warning:

- The installation and testing for the product must be carried out by HDL Automation Co., Ltd. (hereinafter referred to as HDL) or its appointed service agencies. The electric construction shall comply with local laws and safety regulations.
- HDL will not be responsible for any consequence caused by the inexperienced or faulty installation and wiring methods, which are not in accordance with the instructions contained in this datasheet.
- Please contact HDL after-sales departments or our designated service agencies for your maintenance service. Product failures caused by private disassembly are not subject to the warranty.

### Caution:

- Before performing any installation or disassembly procedures on the device, it is crucial to disconnect the device from all voltage sources. This step is necessary to ensure the safety of the technician and prevent any potential damage to the device.
- Do not use corrosive liquid to wipe the device body, especially the interface, so to avoid damage to the device. Do not wipe the device with a damp cloth.
- Before performing any maintenance or cleaning procedures on the device, it is imperative to disconnect the device from all voltage sources. This precautionary measure is necessary in order to prevent electric leakage and the risk of electric shock.
- After all of the cables are terminated, check for correct and good terminations.
- Overrange is not allowed. Please use the device in accordance with the technical specifications.

**Note:**

- The use of this product must not violate any safety regulations, and the product must be 800mm away from the illuminated object.
- Ensure that this product is securely fastened to the surface of the installed object and not installed on ceilings that are easily damaged or deformed.
- In order to extend the service life and maintain the best lighting effect, it is recommended to regularly clean and maintain the product.


## ◆◆ Installation

**Warning:** Before performing any installation or disassembly procedures on the device, it is crucial to disconnect the device from all voltage sources. This step is necessary to ensure the safety of the technician and prevent any potential damage to the device.

This installation instruction includes installation of pre-embedded magnetic tracks, surface mounted magnetic tracks, and suspension magnetic tracks.


**Installation of pre-embedded magnetic tracks is as follows:**





Embedded parts  
(accessory package)




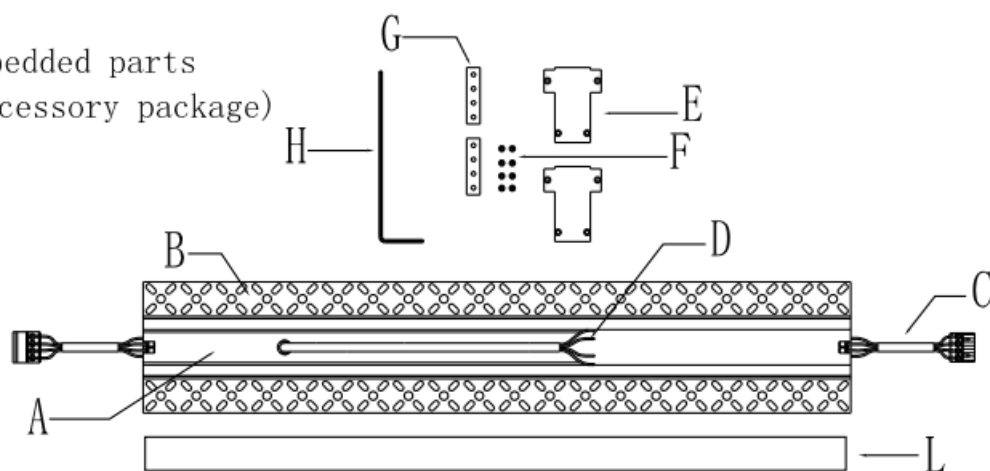






| NO | Model  | Name                      | specification                                             |
|----|--------|---------------------------|-----------------------------------------------------------|
| A  | 603010 | Guide                     | 1000*40.3*53MM                                            |
|    |        | Guide                     | 2000*40.3*53MM                                            |
| B  |        | Hanging board*2           | 1000*30.1*6.1MM                                           |
| C  |        | Male and female plug*2    | Male and female plug pluggable, 6A                        |
| D  |        | Power cord                | 500MM*0.75 <sup>2</sup>                                   |
| E  |        | Plug*2                    | 53*40.3*2MM                                               |
| F  |        | Screw*8                   | M3*6                                                      |
| G  |        | Connector*2               | 40*9.5*1.8MM                                              |
| H  |        | Allen wrench*1            | 120MM M2                                                  |
| I  |        | Through conductive module | Turn on and cut off the electricity of the embedded parts |
| J  | 603901 | Flat corner               | 124*124*53MM                                              |
| K  | 603902 | Facade corner             | 102*102*53MM                                              |
| L  |        | Pearl cotton              |                                                           |


#### Procedures:

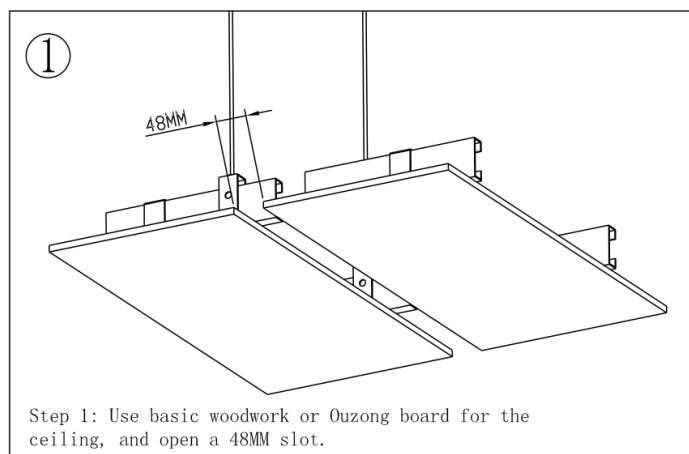


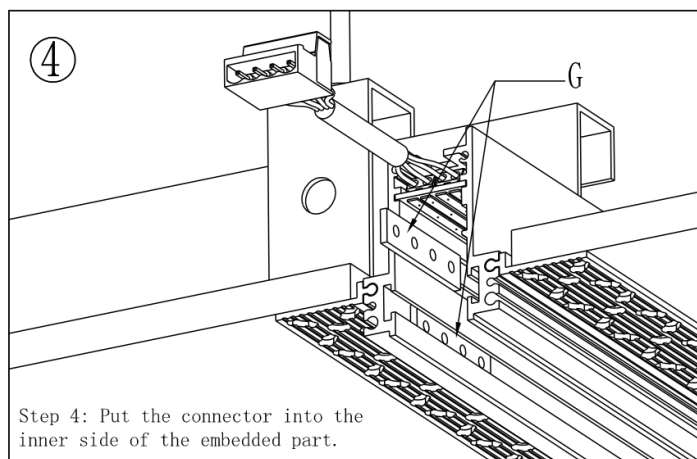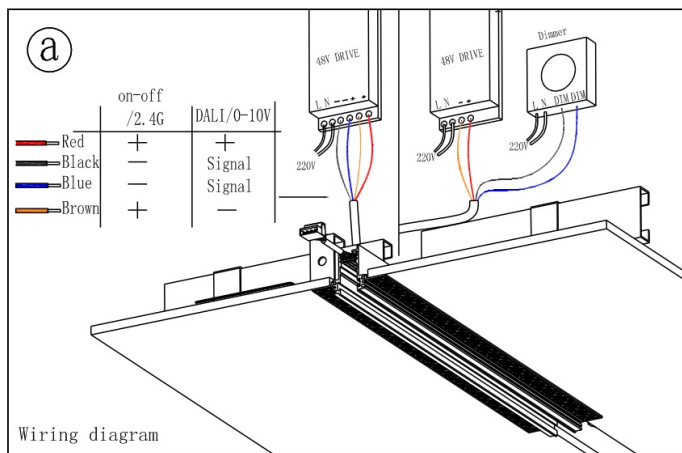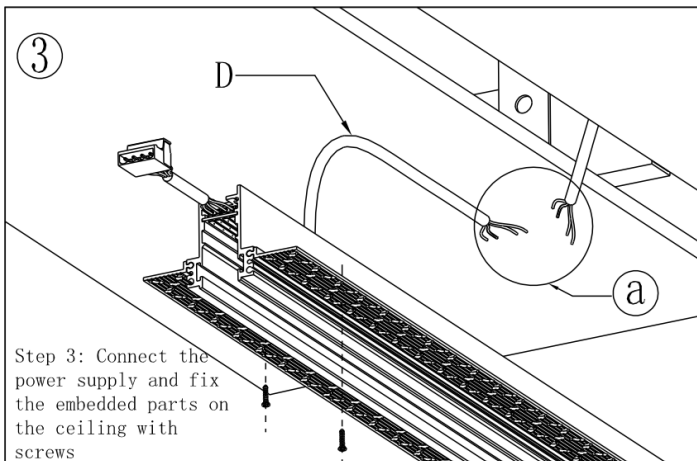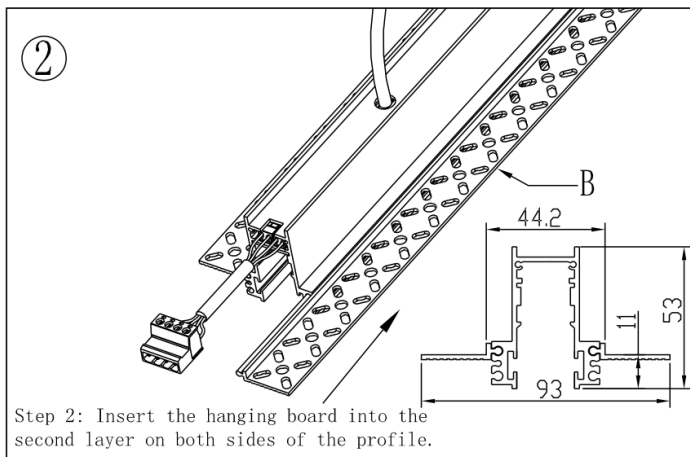

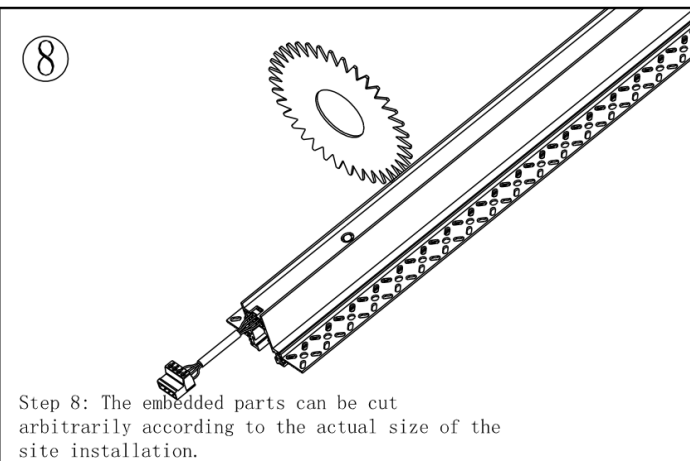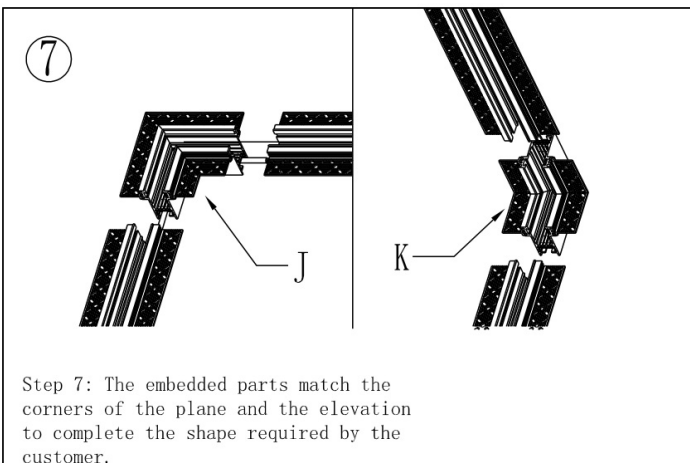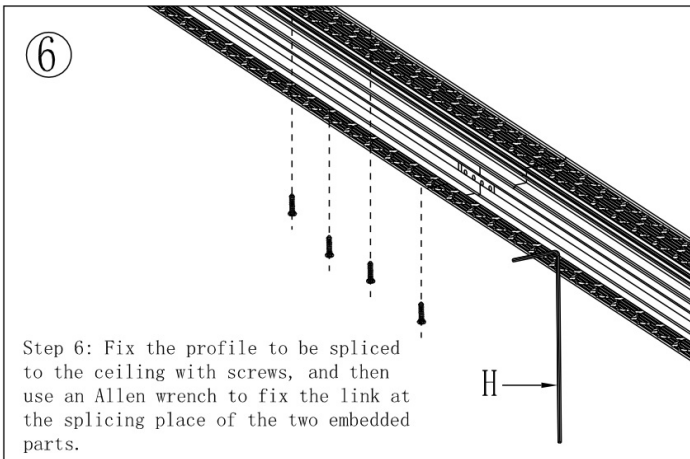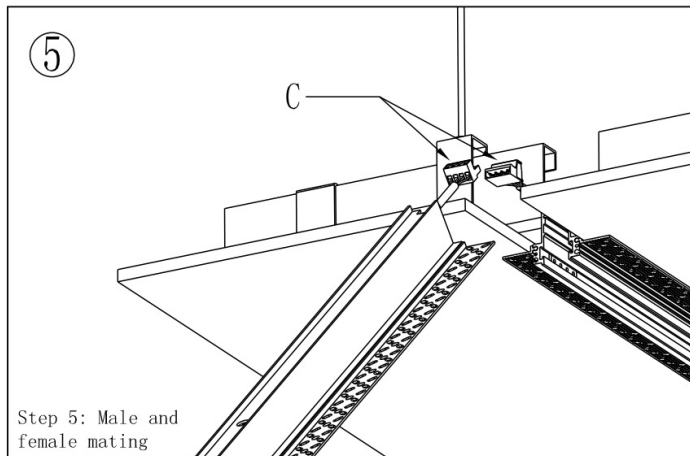

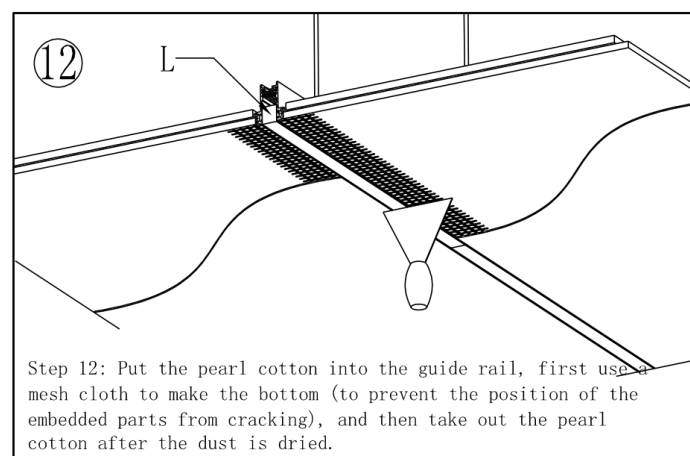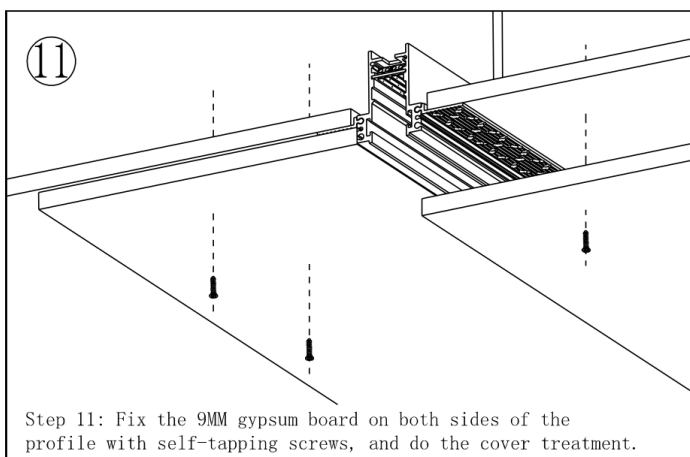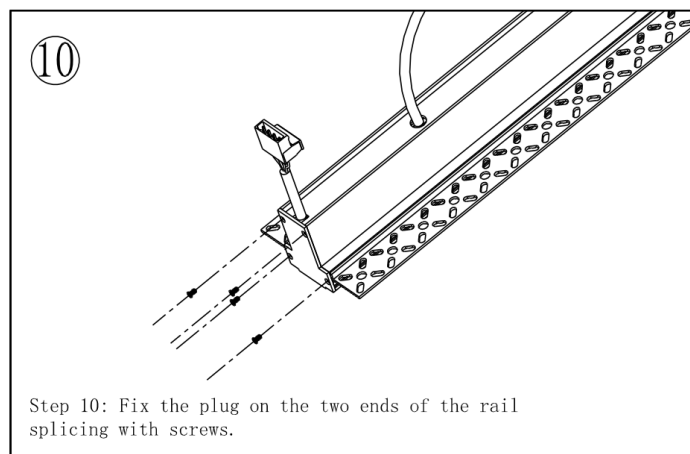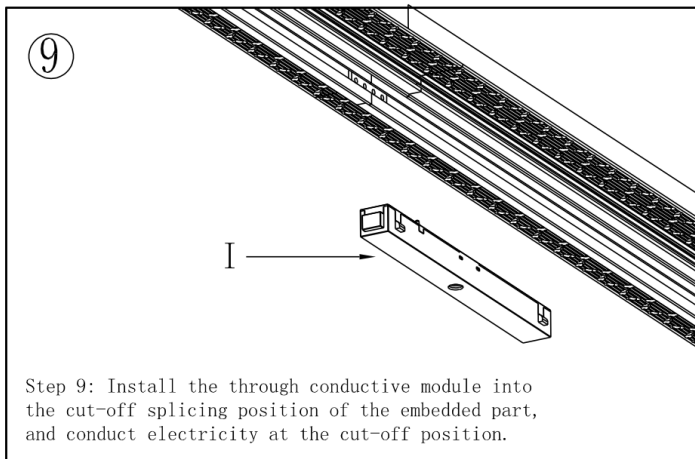

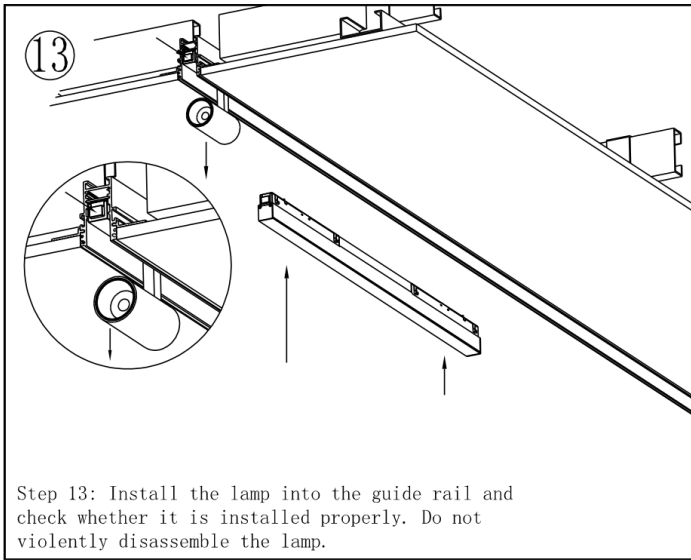

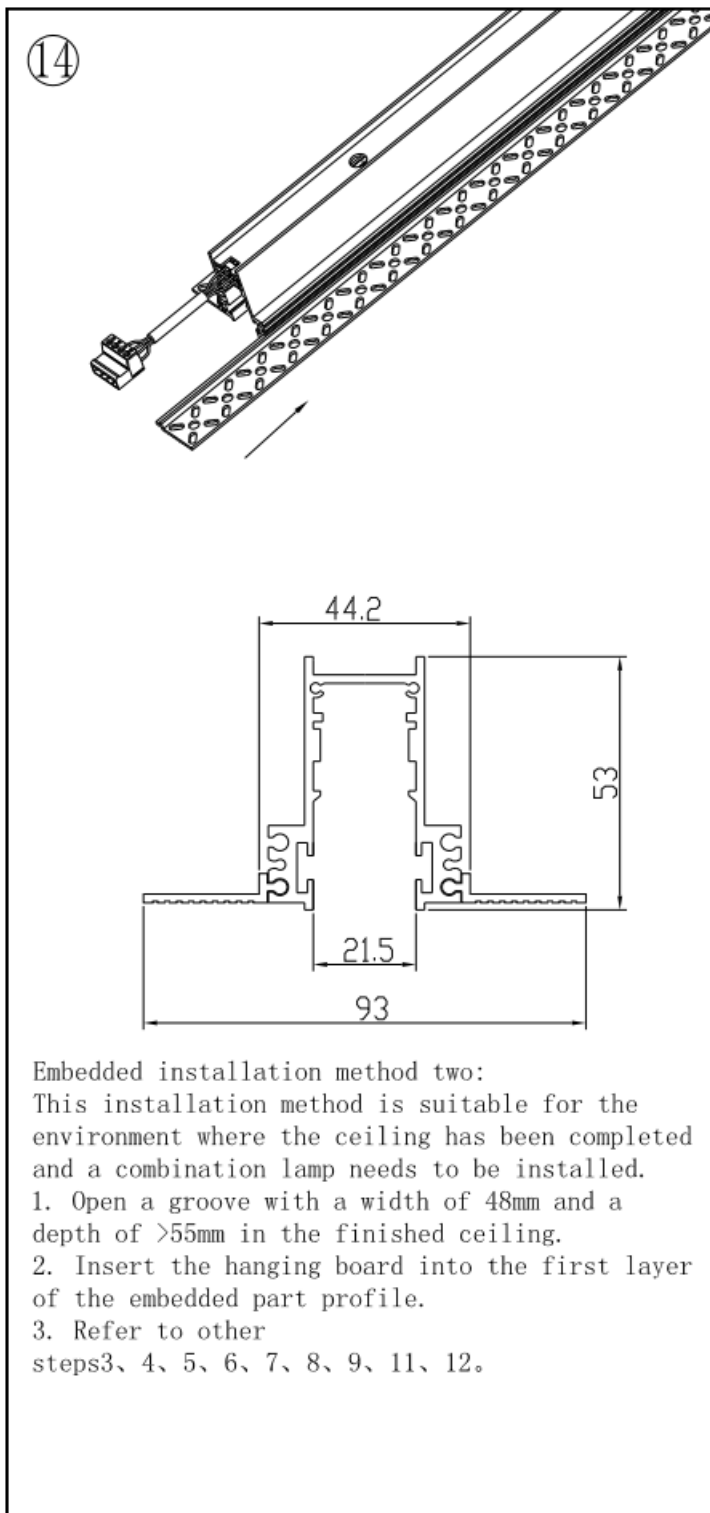


## ◆◆ Disassembly

**Warning:** Before disassembling, please cut off the power supply, and operation with electricity is prohibited.

## ◆◆ Packing List

Embedded parts  
(accessory package)

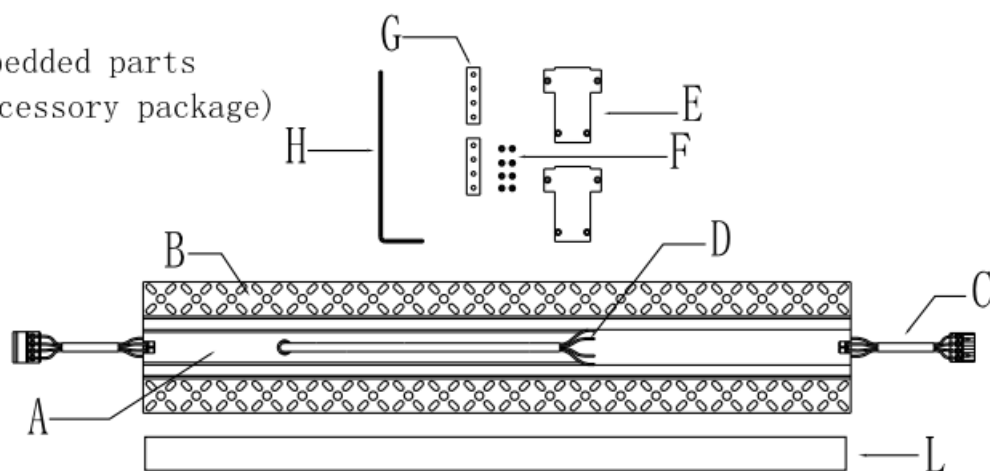

| NO | Model  | Name                      | specification                                             |
|----|--------|---------------------------|-----------------------------------------------------------|
| A  | 603010 | Guide                     | 1000*40.3*53MM                                            |
|    |        | Guide                     | 2000*40.3*53MM                                            |
| B  |        | Hanging board*2           | 1000*30.1*6.1MM                                           |
| C  |        | Male and female plug*2    | Male and female plug pluggable, 6A                        |
| D  |        | Power cord                | 500MM*0.75 <sup>2</sup>                                   |
| E  |        | Plug*2                    | 53*40.3*2MM                                               |
| F  |        | Screw*8                   | M3*6                                                      |
| G  |        | Connector*2               | 40*9.5*1.8MM                                              |
| H  |        | Allen wrench*1            | 120MM M2                                                  |
| I  |        | Through conductive module | Turn on and cut off the electricity of the embedded parts |
| J  | 603901 | Flat corner               | 124*124*53MM                                              |
| K  | 603902 | Facade corner             | 102*102*53MM                                              |
| L  |        | Pearl cotton              |                                                           |

Note: After unpacking, please check if the product and the parts are complete.

## ◆◆ Copyright Statement

HDL has all the intellectual property rights to this document and contents thereof. Reproduction or distribution for third parties are prohibited without written authorization from HDL. Any infringement of HDL's intellectual property rights will be investigated the legal liability.

The contents of this document will be updated as the updates of product versions or other reasons. Unless otherwise agreed upon, this document is to be used as a guidance only. All the statements, information and recommendations in this document makes no warranty expressed or implied.

© 2025 HDL Automation Co., Ltd. All rights reserved.

### Update History:

The form below contains the information of every update. The latest version contains all the updates of all former versions.

| Version | Update Information | Date               |
|---------|--------------------|--------------------|
| V1.0    | Initial release    | September 12, 2025 |

◆◆ Technical Support

E-mail: [hdltickets@hdlautomation.com](mailto:hdltickets@hdlautomation.com)

Website: <https://www.hdlautomation.com>