


2M Suspended Magnetic Track

Datasheet



CX-DZ2000

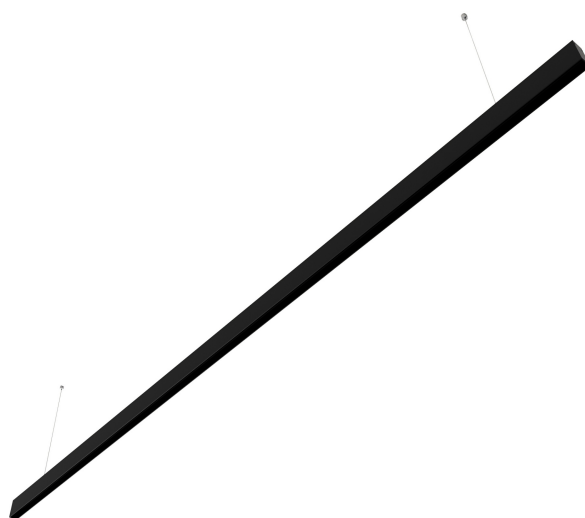

Please scan the QR code above to check the latest version of datasheet!

Before using this product, please read this datasheet carefully and keep it properly!

Document Version: C

◆◆ Overview

2M Suspended Magnetic Track (hereinafter referred to as the “product” or “device”) is a magnetic track for magnetic lights, primarily suitable for indoor spaces such as hotels, luxury homes, clubs, model rooms, sales offices, museums, restaurants, shopping malls, shops, etc., which require special lighting.

Main functions:

- 2M Suspended Magnetic Track with black painted finish (RAL 9005);
- Measurement 2000mm x 21mm; height of the profile inset 55mm;
- Degree of housing protection according to DIN EN 60529 (IP20) ;
- Additional power supply required: 48V Power Supply.

Note: Please note that the pictures and illustrations provided in this instruction manual are for reference purposes only, and the actual product may differ.

◆◆ Appearance



Figure 1

◆◆ Specifications

Item	Parameter
Dimensions	2000mm x 21mm
Height	55mm
Type	Magnetic Track
Weight	1703g
Installation	Suspended
Installation site	Indoor
Version	Rectangle

Housing	Black
IP degree (compliant with EN 60529)	IP20



Figure 2

◆◆ Safety Precaution

Danger:

- Please do not privately disassemble or replace any parts of the product. Otherwise, it may cause mechanical fault, electric shock, fire or personal injuries.
- Under no circumstances should the product be covered by insulation pads or similar materials.

Warning:

- The installation and testing for the product must be carried out by HDL Automation Co., Ltd. (hereinafter referred to as HDL) or its appointed service agencies. The electric construction shall comply with local laws and safety regulations.
- HDL will not be responsible for any consequence caused by the inexpert or faulty installation and wiring methods, which are not in accordance with the instructions contained in this datasheet.
- Please contact HDL after-sales departments or our designated service agencies for your maintenance service. Product failures caused by private disassembly are not subject to the warranty.

Caution:

- Before performing any installation or disassembly procedures on the device, it is crucial to disconnect the device from all voltage sources. This step is necessary to ensure the safety of the technician and prevent any potential damage to the device.
- Do not use corrosive liquid to wipe the device body, especially the interface, so to avoid damage to the device. Do not wipe the device with a damp cloth.
- Before performing any maintenance or cleaning procedures on the device, it is imperative to disconnect the device from all voltage sources. This precautionary measure is necessary in order to prevent electric leakage and the risk of electric shock.
- After all of the cables are terminated, check for correct and good terminations.
- Overrange is not allowed. Please use the device in accordance with the technical specifications.


Note:

- The use of this product must not violate any safety regulations, and the product must be 800mm away from the illuminated object.
- Ensure that this product is securely fastened to the surface of the installed object and not installed on ceilings that are easily damaged or deformed.
- In order to extend the service life and maintain the best lighting effect, it is recommended to regularly clean and maintain the product.


◆◆ Installation

Warning: Before performing any installation or disassembly procedures on the device, it is crucial to disconnect the device from all voltage sources. This step is necessary to ensure the safety of the technician and prevent any potential damage to the device.


Installation of suspension magnetic tracks is as follows:

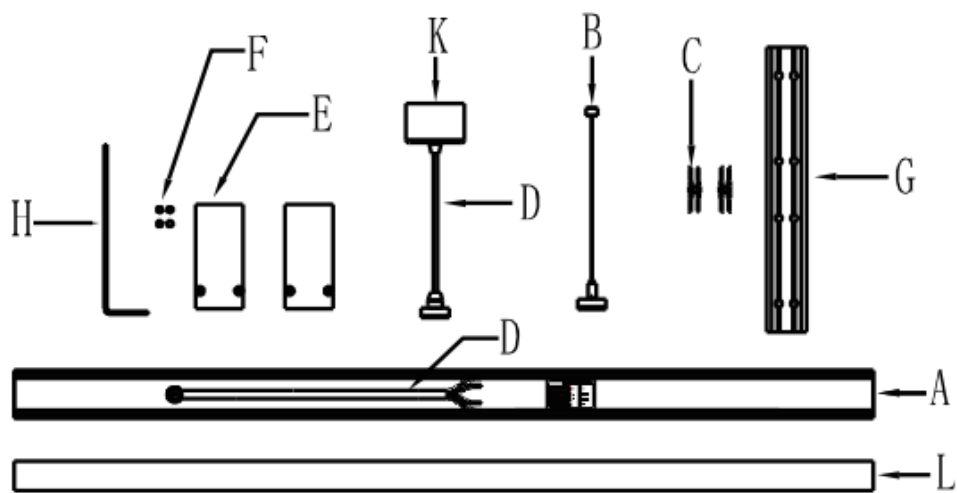

NO	Model	Name	specification
A	603310	Rail	1000*25.1*55MM
		Rail	2000*25.1*55MM
B		Sling assembly	2M
C		Pin*2	3A
D		Power cord	1500MM 4*0.75 ²
E		Cap*2	55.1*25.1*2MM
F		Cap screw*4	M3*6
G		Connector*1	150*21*3.5MM
H		Wrench*1	120MM M2
I		Conducting module	
J	603903	Flat corner	100*100*25.1MM
K		Power cord kit	
L		Pearl wool	
M		Power source	100W/150W/200W

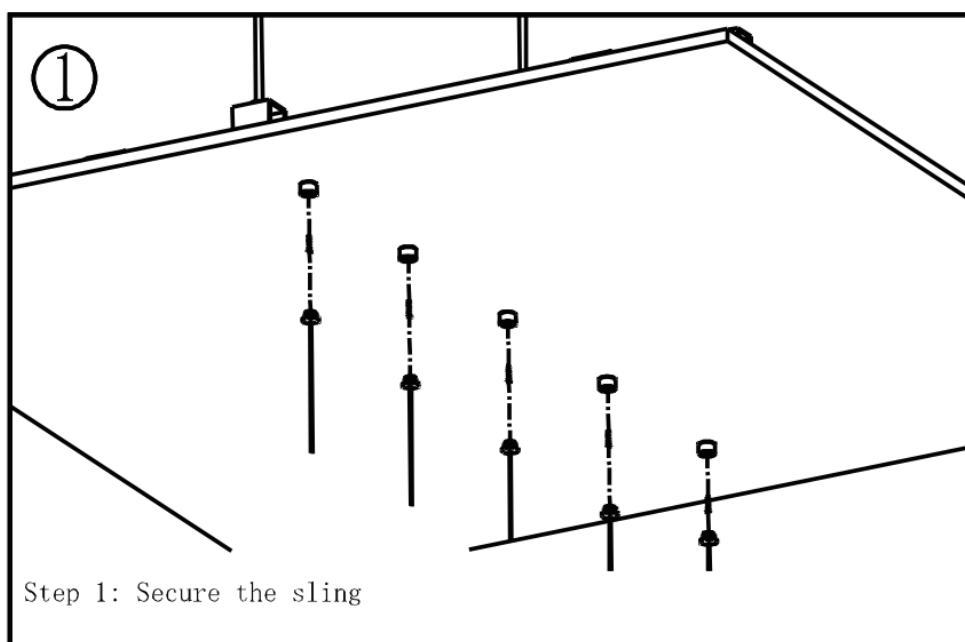


②

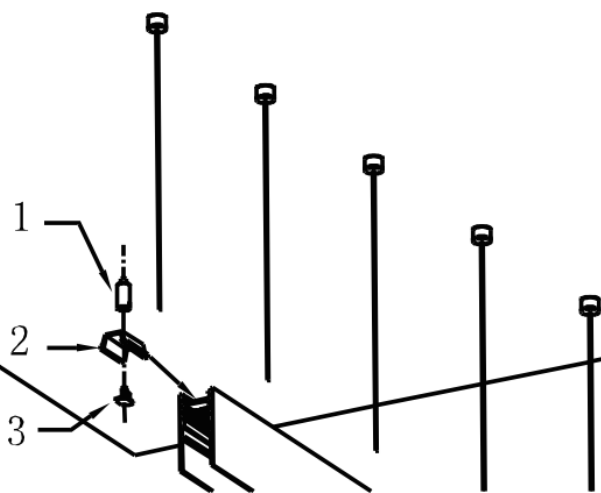


Rope fittings 1, 2 and 3 are assembled and inserted into the back of the profile.

③

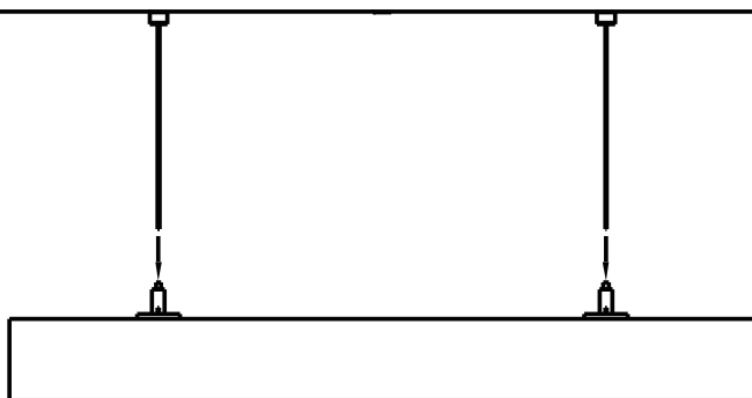


Step 3: Insert the sling

④

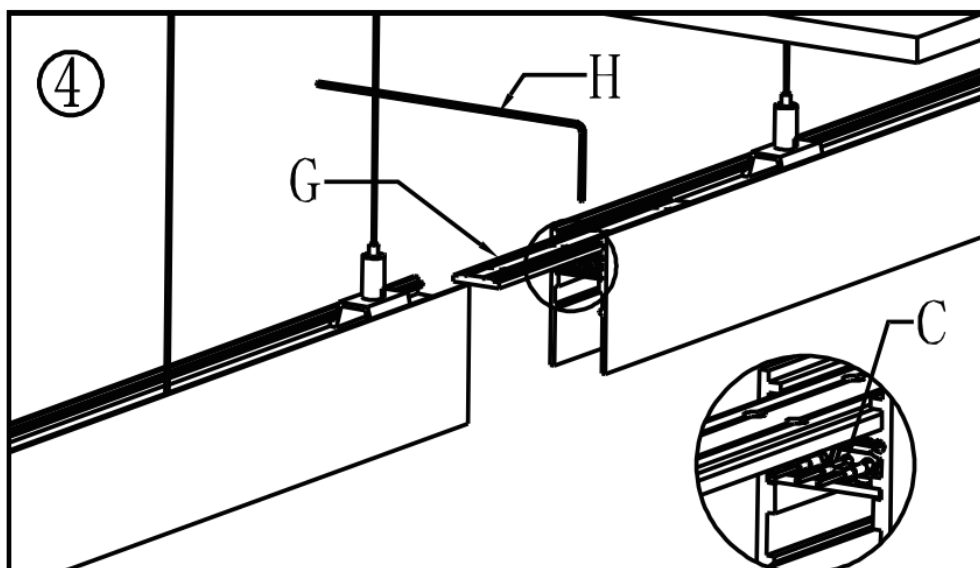


Step 4: Insert the pin into the conductive plate terminal, connect the guide rail, and fix the guide rail with an Allen wrench.

⑤

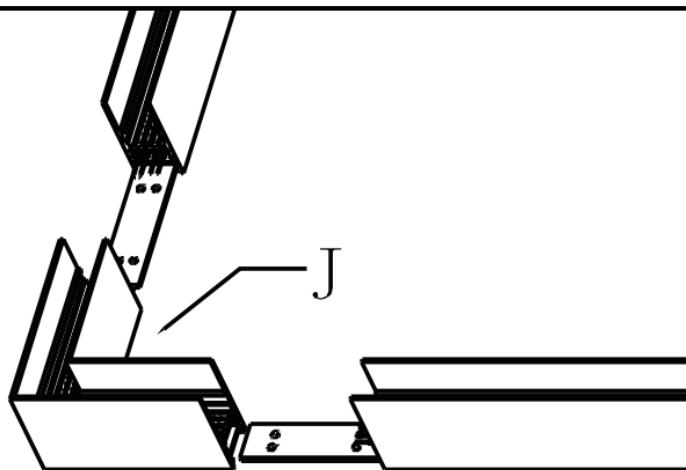


Step 5: The embedded part is matched with the flat corner to complete the shape required by the customer

⑥

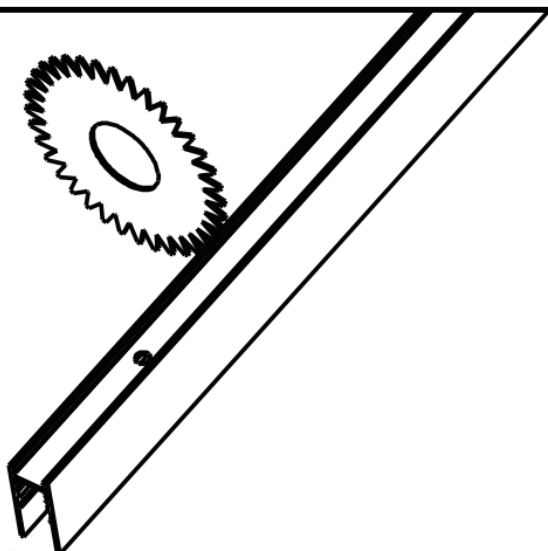


Step 6: The guide rail can be cut off arbitrarily according to the actual size of the site installation.

⑦

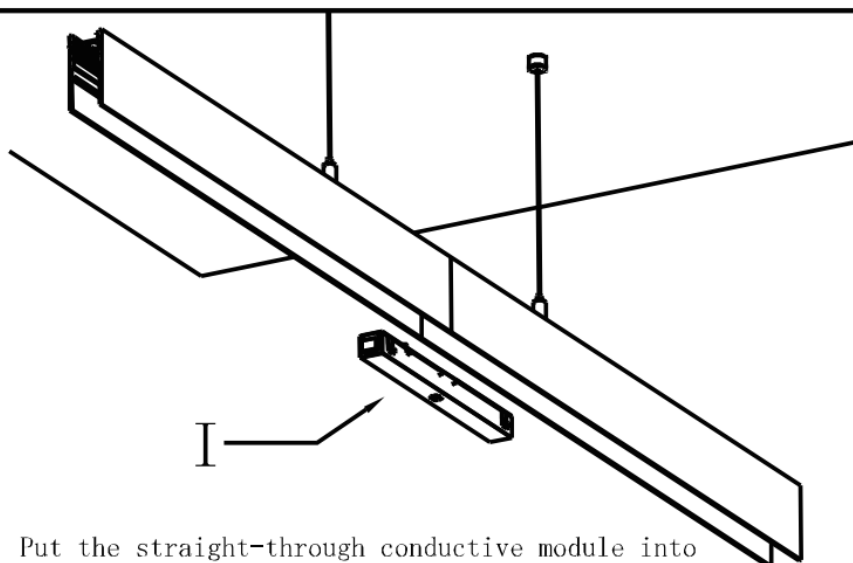


Step 7: Put the straight-through conductive module into the guide rail to cut off the splicing position, and turn on the conductivity of the cut off position.

⑧




Step 8: Lock the plug

⑨


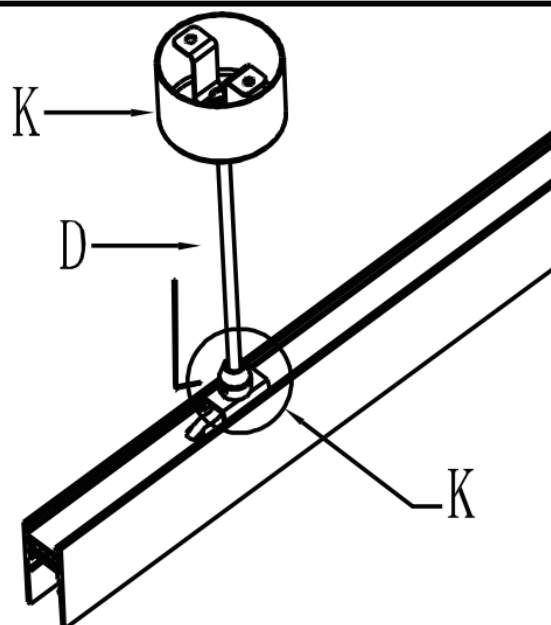


Step 9: Secure the power cord


⑩

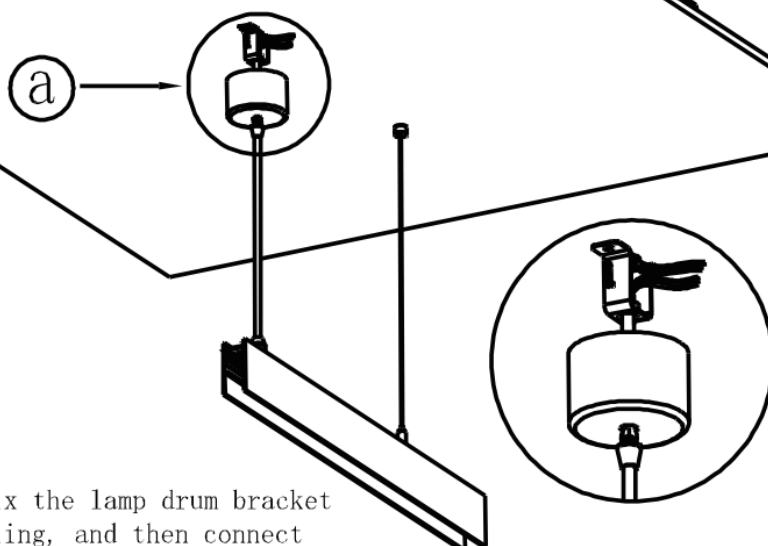


Step 10: Fix the lamp drum bracket to the ceiling, and then connect the power cord.

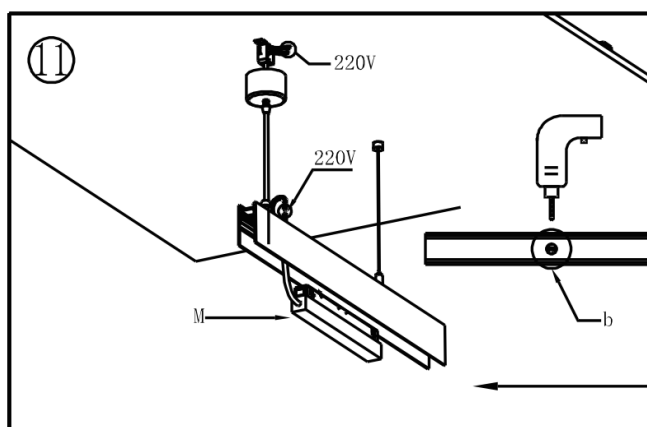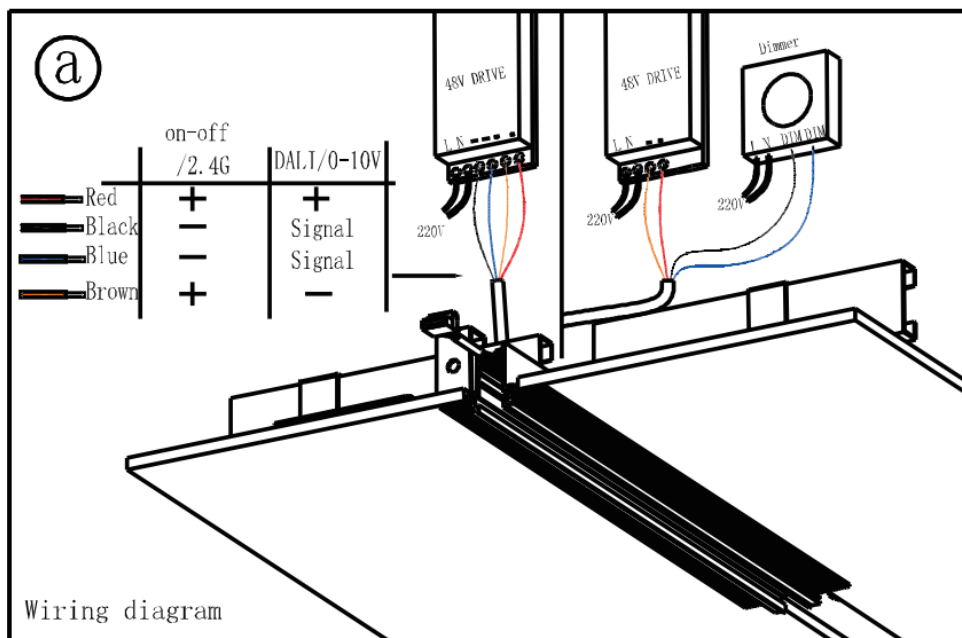

Step 11: Use an electric drill to drill a $\varnothing 8$ hole in the conductive board on guide rail b, route the all-in-one power cable through the hole and connect the power cable, and then install the all-in-one power supply into the guide rail. (The power supply is installed at both ends of the guide rail head)

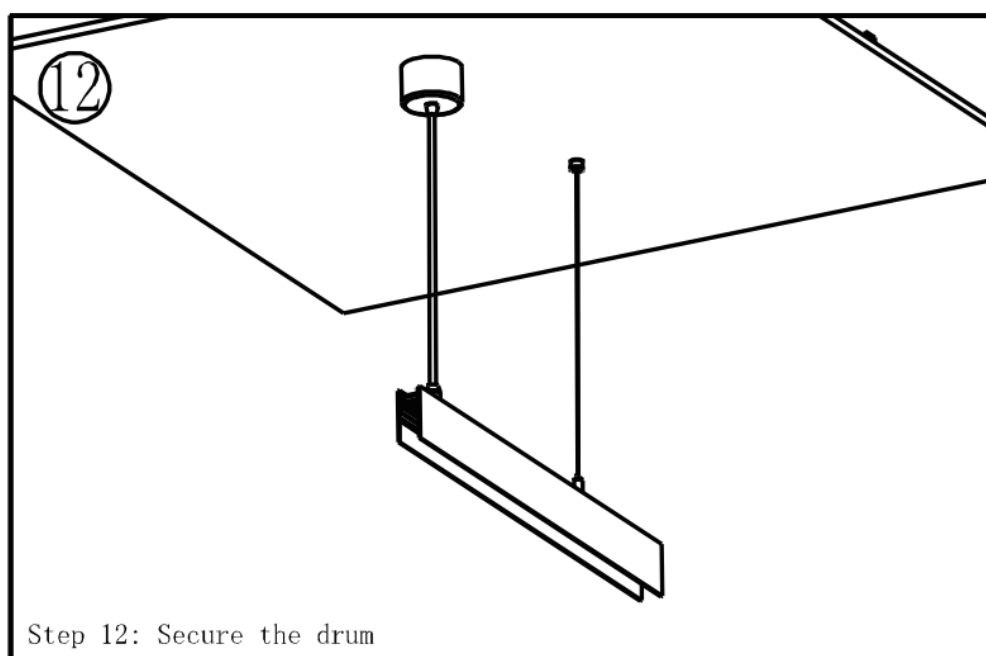


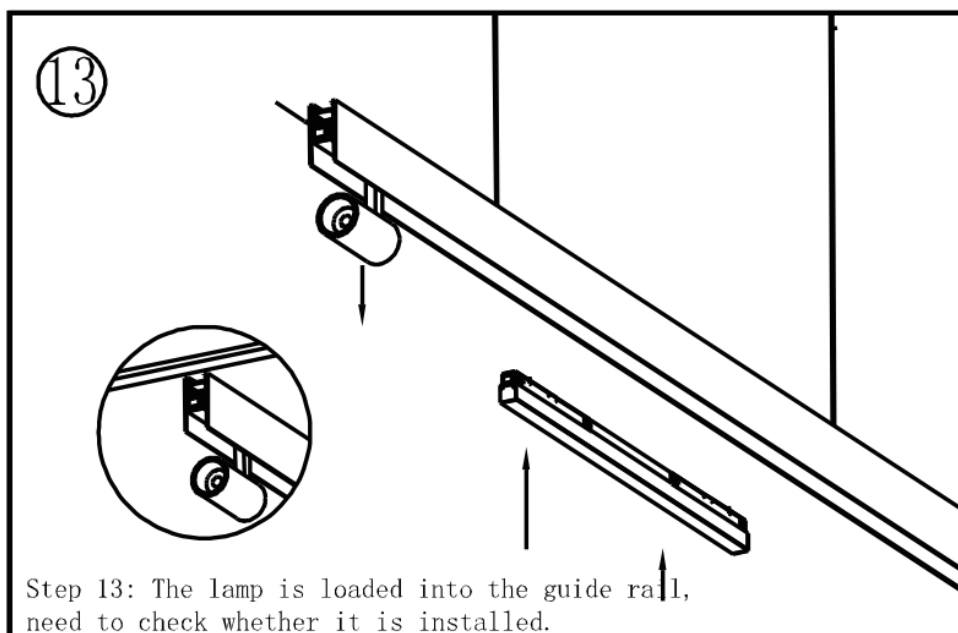

◆◆ Disassembly

Warning: Before disassembling, please cut off the power supply, and operation with electricity is prohibited.

◆◆ Packing List

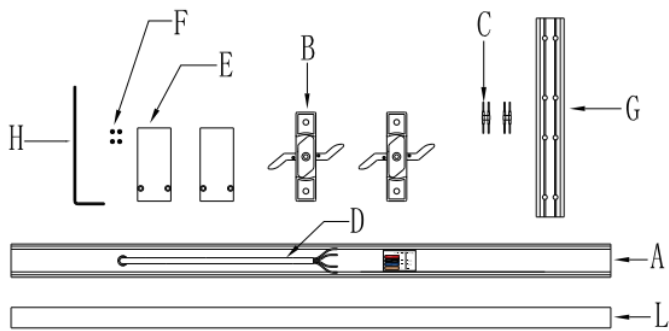

NO	Model	Name	specification
A	603110	Rail	1000*25.1*55MM
		Rail	2000*25.1*55MM
B		Mounting bracket*2	67*25.2*9.3MM
C		Pin*2	3A
D		Power cord	500MM 4*0.75 ²
E		Cap*2	55.1*25.1*2MM
F		Cap screw*4	M3*6
G		Connector*1	150*21*3.5MM
H		Wrench*1	120MM M2
I		Conducting module	
J	603903	Flat corner	100*100*25.1MM
K	603904	Elevation corner	100*100*25.1MM
L		Pearl wool	
M		Power source	100W/150W/200W

Note: After unpacking, please check if the product and the parts are complete.

◆◆ Copyright Statement

HDL has all the intellectual property rights to this document and contents thereof. Reproduction or distribution for third parties are prohibited without written authorization from HDL. Any infringement of HDL's intellectual property rights will be investigated the legal liability.

The contents of this document will be updated as the updates of product versions or other reasons. Unless otherwise agreed upon, this document is to be used as a guidance only. All the statements, information and recommendations in this document makes no warranty expressed or implied.

© 2025 HDL Automation Co., Ltd. All rights reserved.

Update History:

The form below contains the information of every update. The latest version contains all the updates of all former versions.

Version	Update Information	Date
V1.0	Initial release	September 12, 2025

◆◆ Technical Support

E-mail: hdltickets@hdlautomation.com

Website: <https://www.hdlautomation.com>