



## HD-TH40D75

### General

- Indoor
- Downlight
- Recessed
- Version: round
- Housing: white
- Reflector: chrome
- System Output: 490lm
- IP 20

### LED



- 2700K/3000K/3500K/4000K
- CRI>90
- 50000h@L80B10
- SDCM: 3

### Optics

- Beam angle: 36°/60°
- UGR <19

### Electric

- LED Driver: none
- LED Power: 7W
- 36V
- 150mA


### Dimensions

- Measurement: Ø84mm
- Cutout: Ø75mm
- Height: 34mm


### Description

- Round fixed Recessed Downlight (75 Series) made of die-cast aluminum with white powder-coating finish (RAL 9016) and white/black/chrome reflector;
- Work with DALI/0-10V/TRIAC dimming driver;
- LED 7W;
- Measurement Ø84mm; ceiling cutout of Ø75mm with a narrow mounting trim;
- High color rendering at an index of CRI90;
- After a lifetime of 50000h min. 80% of the luminous flux with energy efficient Luminus LED Chips;
- 5 years warranty;
- Beam characteristic with 36°/60° beam angles;
- Lighting perfectly suitable for reading, writing as well as computer and control work according to DIN EN 12464-1(UGR<19);
- Degree of housing protection according to DIN EN 60529 (IP20).

### Light distribution




| 7W 36° |      |       |                  |
|--------|------|-------|------------------|
| Lux    |      |       |                  |
| h(m)   | d(m) | Em    | E <sub>max</sub> |
| 1      | 0.61 | 1040  | 1481             |
| 2      | 1.22 | 260.6 | 370.3            |
| 3      | 1.83 | 115.8 | 164.6            |



| 7W 60° |      |       |                  |
|--------|------|-------|------------------|
| Lux    |      |       |                  |
| h(m)   | d(m) | Em    | E <sub>max</sub> |
| 1      | 1.03 | 435.1 | 790.3            |
| 2      | 2.06 | 108.8 | 197.6            |
| 3      | 3.09 | 48.35 | 87.81            |



### Technical drawing

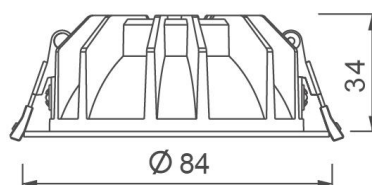

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors.