

CX5003F



General

- Indoor
- Spotlight
- Install onto the track, adjustable
- Profile Inset
- Version: round
- Housing: black
- System Output: 720lm
- IP 20

LED



- 2700K/3000K/3500K/4000K/5000K
- CRI>90
- 50000h@L80B10
- SDCM: 3

Optics

- Beam angle: 16°/24°/36°
- UGR <15

Electric

- LED Driver: ON-OFF
- LED Power: 12W
- 48V


Dimensions

- Measurement: Ø60mm
- Height: 125mm


Description

- Magnetic Track Spotlight Inset with ON-OFF;
- Black painted finish (RAL 9005);
- LED 12W;
- Measurement Ø60mm; height of the spotlight is 125mm; wide of the profile inset is 186mm;
- High color rendering at an index of CRI90;
- After a lifetime of 50000h min. 80% of the luminous flux with energy efficient Luminus LED Chips;
- 5 years warranty;
- Precise beam characteristic with 16°/24°/36° beam angles;
- Lighting perfectly suitable for reading, writing as well as computer and control work according to DIN EN 12464-1 (UGR<15);
- Degree of housing protection according to DIN EN 60529 (IP20).


Light distribution



12W 16°				
Lux				
h(m)	d(m)	Em	E _{max}	
1	0.23	7605	11995	
2	0.46	1901	2999	
3	0.69	845	1333	



12W 24°				
Lux				
h(m)	d(m)	Em	E _{max}	
1	0.36	3839	5800	
2	0.72	959.7	1450	
3	1.08	426.5	644.5	



12W 36°				
Lux				
h(m)	d(m)	Em	E _{max}	
1	0.7	1975	2944	
2	1.4	493.7	735.9	
3	2.1	219.4	327.1	



CB


CE

RoHS



Driver

Technical drawing

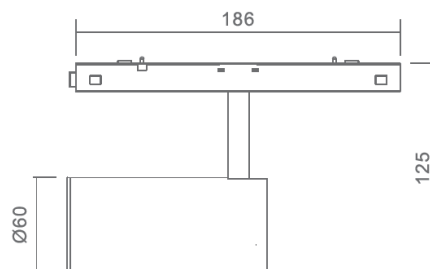

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors.