

CX6003F



General

- Indoor
- General Light
- Install onto the track
- Profile Inset
- Version: rectangle
- Housing: black
- System Output: 1200lm
- IP 20

LED

OSRAM

- 2700K/3000K/3500K/4000K/5000K
- CRI>90
- 50000h@L80B10
- SDCM: 3

Optics

- Beam angle: 120°
- UGR <15

Electric

- LED Driver: ON-OFF
- LED Power: 20W
- 48V


Dimensions

- Measurement: 963mm x 20mm
- Height: 40mm

Description

- Magnetic Surface Light Inset with ON-OFF;
- Black painted finish (RAL 9005);
- LED 20W;
- Measurement 963mm x 20mm; height of the profile inset is 40mm;
- High color rendering at an index of CRI90;
- After a lifetime of 50000h min. 80% of the luminous flux with energy efficient OSRAM LED Chips;
- 5 years warranty;
- Precise beam characteristic with 120° beam angle;
- Lighting perfectly suitable for reading, writing as well as computer and control work according to DIN EN 12464-1 (UGR<15);
- Degree of housing protection according to DIN EN 60529 (IP20).

Light distribution

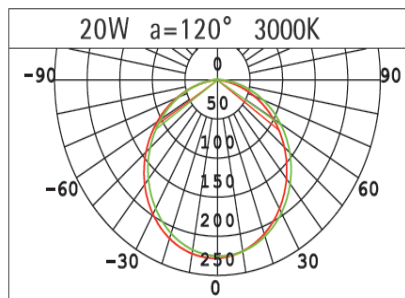

20W 120°

Lux

h(m)	d(m)	Em	Emax
1	3.08	65.39	227.8
2	6.16	16.35	56.96
3	9.24	7.265	25.31



CB

CE

RoHS



Driver

Technical drawing



The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors.