

# Datasheet

## CX60D01



### General

- Indoor
- General Light
- Install onto the track
- Profile Inset
- Version: rectangle
- Housing: black
- System Output: 360lm
- IP 20

### LED



- 2700K/3000K/3500K/4000K/5000K
- CRI>90
- 50000h@L80B10
- SDCM: 3

### Optics

- Beam angle: 120°
- UGR <15

### Electric

- LED Driver: DALI
- LED Power: 6W
- 36V


### Dimensions

- Measurement: 387mm x 20mm
- Height: 40mm

### Description

- Magnetic Surface Light Inset with DALI dimming driver;
- Black painted finish (RAL 9005);
- LED 6W;
- Measurement 387mm x 20mm; height of the profile inset is 40mm;
- High color rendering at an index of CRI90;
- After a lifetime of 50000h min. 80% of the luminous flux with energy efficient OSRAM LED Chips;
- 5 years warranty;
- Precise beam characteristic with 120° beam angle;
- Lighting perfectly suitable for reading, writing as well as computer and control work according to DIN EN 12464-1 (UGR<15);
- Degree of housing protection according to DIN EN 60529 (IP20).

### Light distribution

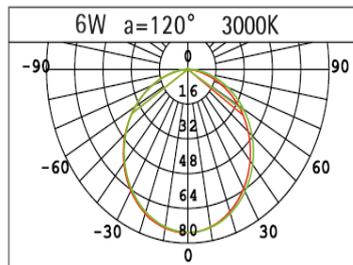

### 6W 120°

Lux			
h(m)	d(m)	Em	E <sub>max</sub>
1	3.05	21.70	75.20
2	6.10	5.426	18.80
3	9.15	2.411	8.356




CB

CE

RoHS



### Technical drawing



The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors.

