



HD-TH40D95

General

- Indoor
- Downlight
- Recessed
- Version: round
- Housing: white
- Reflector: chrome
- System Output: 1050lm
- IP 20

LED



- 2700K/3000K/3500K/4000K
- CRI>90
- 50000h@L80B10
- SDCM: 3

Optics

- Beam angle: 36°/60°
- UGR <19

Electric

- LED Driver: none
- LED Power: 15W
- 36V
- 350mA


Dimensions

- Measurement: Ø105mm
- Cutout: Ø95mm
- Height: 42mm

Description


- Round fixed Recessed Downlight (95 Series) made of die-cast aluminum with white powder-coating finish (RAL 9016) and white/black/chrome reflector;
- Work with DALI/0-10V/TRIAC dimming driver;
- LED 15W;
- Measurement Ø105mm; ceiling cutout of Ø95mm with a narrow mounting trim;
- High color rendering at an index of CRI90;
- After a lifetime of 50000h min. 80% of the luminous flux with energy efficient Luminus LED Chips;
- 5 years warranty;
- Beam characteristic with 36°/60° beam angles;
- Lighting perfectly suitable for reading, writing as well as computer and control work according to DIN EN 12464-1(UGR<19);
- Degree of housing protection according to DIN EN 60529 (IP20).

Light distribution



15W 36°

Lux			
h(m)	d(m)	Em	E _{max}
1	0.54	2347	3546
2	1.08	586.7	886.5
3	2.12	260.8	394.0




15W 60°

Lux			
h(m)	d(m)	Em	E _{max}
1	1.10	883.6	1395
2	2.20	220.9	348.9
3	3.30	98.18	155.0



Technical drawing

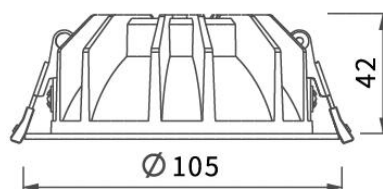

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors.