



## HD-TH60D02

### General

- Indoor
- Accent Light
- Recessed, fixed
- Profile Inset
- Version: rectangle
- Housing: white/black
- Reflector: black
- System Output: 240lm
- IP 20

### LED



- 2700K/3000K/3500K/4000K/5000K
- CRI>90
- 50000h@L80B10
- SDCM: 3

### Optics

- Beam angle: 15°/25°/30°
- UGR <15

### Electric

- LED Driver: none
- LED Power: 4W
- 6V
- 600mA


### Dimensions

- Measurement: 80mm x 46mm
- Height: 60mm
- Cutout: 72mm x 42mm

### Description

- 2-Bulb Recessed Grid Light with white/black painted finish (RAL 9016/RAL 9005) and black reflector;
- Work with DALI/0-10V/TRIAC dimming driver;
- LED 4W;
- Measurement 80mm x 46mm; height of the profile inset 60mm;
- High color rendering at an index of CRI90;
- After a lifetime of 50000h min. 80% of the luminous flux with energy efficient OSRAM LED Chips;
- 5 years warranty;
- Precise beam characteristic with 15°/25°/30° beam angles;
- Lighting perfectly suitable for reading, writing as well as computer and control work according to DIN EN 12464-1 (UGR<15);
- Degree of housing protection according to DIN EN 60529 (IP20).


### Light distribution

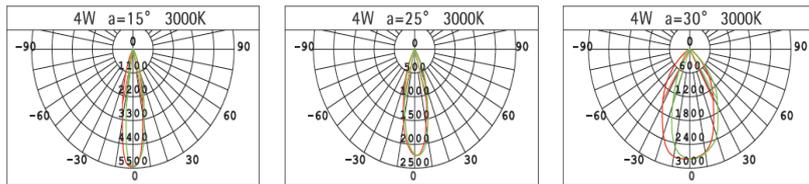

4W 15°				4W 25°				4W 30°			
Lux				Lux				Lux			
h(m)	d(m)	Em	E <sub>max</sub>	h(m)	d(m)	Em	E <sub>max</sub>	h(m)	d(m)	Em	E <sub>max</sub>
1	0.23	3769	5491	1	0.51	1492	2236	1	0.68	1954	2859
2	0.46	942.3	1373	2	1.02	372.9	559.1	2	1.36	488.5	714.8
3	0.69	418.8	610.1	3	1.53	165.8	248.5	3	2.04	217.1	317.7



### Technical drawing

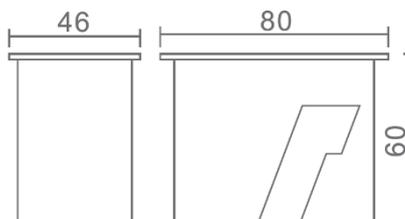

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors.