

HD-TH5006



General

- Indoor
- Accent Light
- Recessed, fixed
- Profile Inset
- Version: rectangle
- Housing: white
- Reflector: black
- System Output: 600lm
- IP 20

LED

- 2800K-6000K
- CRI>90
- 50000h@L80B10
- SDCM: 3

Optics

- Beam angle: 15°/24°/36°
- UGR <15

Electric

- LED Driver: none
- LED Power: 10W
- 36V
- 250mA


Dimensions

- Measurement: 143.3mm x 31.5mm
- Height: 38.3mm
- Cutout: 139mm x 26mm


Description

- 6-Bulb Square Mini Grid Light with white painted finish (RAL 9016) and black reflector;
- Work with DALI dimming driver;
- LED 10W;
- Measurement 143.3mm x 31.5mm; height of the profile inset 38.3mm;
- High color rendering at an index of CRI90;
- After a lifetime of 50000h min. 80% of the luminous flux;
- 5 years warranty;
- Precise beam characteristic with 15°/24°/36° beam angles;
- Lighting perfectly suitable for reading, writing as well as computer and control work according to DIN EN 12464-1 (UGR<15);
- Degree of housing protection according to DIN EN 60529 (IP20).


Light distribution



10W 15° 698lm				
Lux				
h(m)	d(m)	Em	Emax	
1	0.39	2724	3973	
2	0.78	681	993.2	
3	1.18	302.7	441.4	
4	1.57	170.2	248.3	
5	1.97	109	158.9	



10W 24° 635lm				
Lux				
h(m)	d(m)	Em	Emax	
1	0.46	1954	2846	
2	0.91	488.4	711.5	
3	1.37	217.1	316.2	
4	1.83	122.1	177.9	
5	2.29	78.14	113.8	



10W 36° 608lm				
Lux				
h(m)	d(m)	Em	Emax	
1	0.53	1342	1976	
2	1.06	335.6	494.1	
3	1.59	149.1	219.6	
4	2.12	83.89	123.5	
5	2.65	53.69	79.05	



CB


CE

RoHS



Driver

Technical drawing

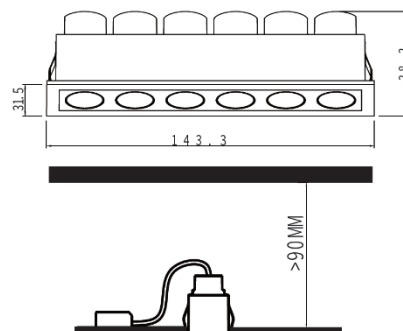

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors.